


PTB Series

Linking Conveyor and Dual Lane Linking Conveyor



Prey
By Detech

PTB Series Linking Conveyor PTB-D Series Dual Lane Linking Conveyor

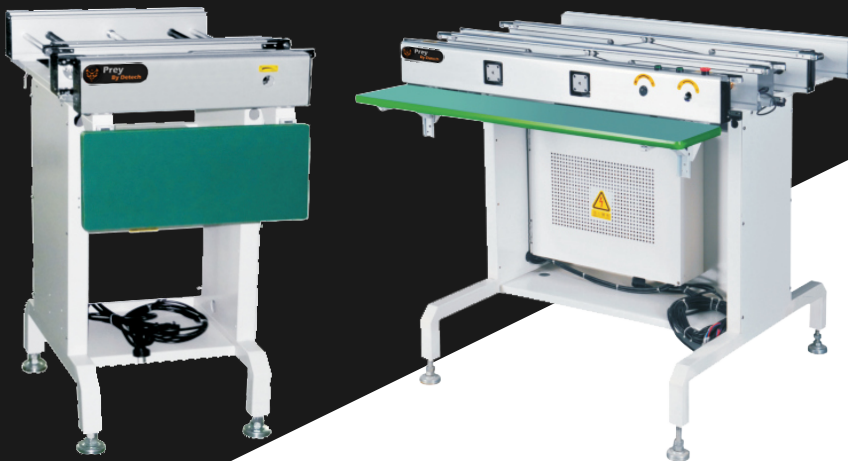

This unit is used to link between SMD machines.
Sturdy and stable design.

High quality ESD conveyor belt for a long lasting lifetime and easy to replace.
Special guiding mechanism installed at the entrance and exit of this unit for the smoothest and stablest operation.
Smooth and parakkek width adjustment.
SMEMA compatible

Specification

Size	L	XL	L
Model	PTB-350	PTB-460	PTB-D300
PCB Size (mm)	80 x 50 ~ 400 x 350	80 x 50 ~ 510 x 460	80 x 50 ~ 330 x 300
Conveyor Height (mm)	900±20	900±20	900±20
Dimension (mm)	500 ~ 2500 (L) Specified by customer		
	560(W)	630 (W)	750(W)
	900 (H)		
Weight (kg)	55 ~ 120	55 ~ 130	70 ~ 150
Conveyor Speed	0.5 ~ 20 m/min or specify		
Power Supply	1 φ 220V, Max.150VA		
Max Board Weight	1.5 Kg for Belt conveyor. Optional: Max 4 Kg for Chain conveyor		
Flow Direction	Left to Right. Optional: Right to Left		

Detech Europe Limited

The Farm Office, Model Farm, Atwick Road, Bewholme, East Riding of Yorkshire, YO25 8DT
Email: sales@detech-europe.com Tel: +44 (0)1262 409944 Website: www.detech-europe.com